



山西瑞杰国际贸易有限公司

GKGD International Trade Co., Ltd

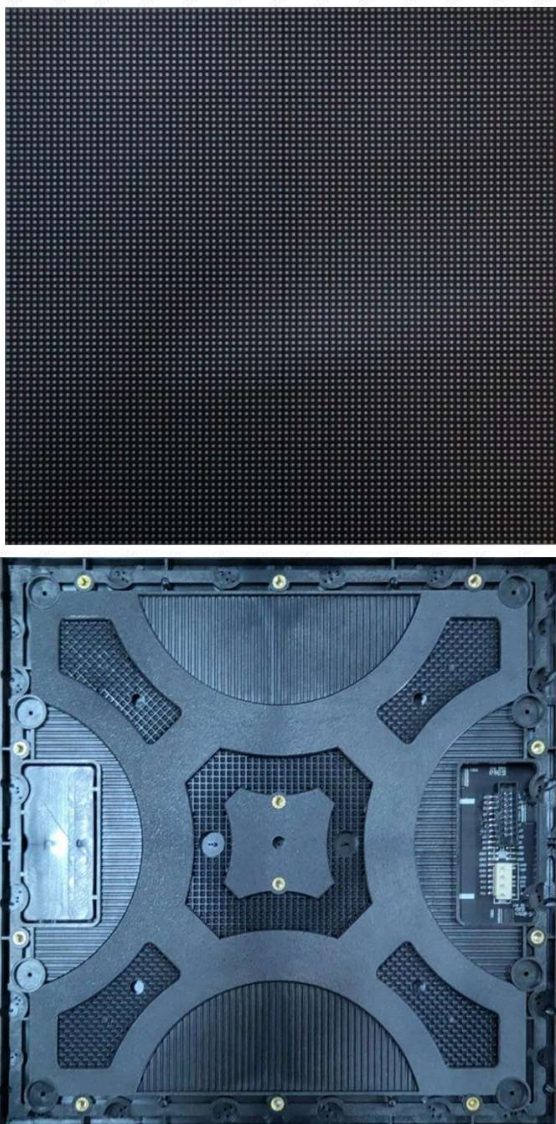
Add: No. 15, west section of Huifeng street, Changzhi economic and Technological Development Zone, Shanxi Province

Tel: +86 15602330915

Fax: +86 355 5807562

Website: www.gkgd.com

Specification of PH3.91 Indoor LED Module

Module		Module photo
Pixel pitch	3.91mm	
Pixel Density	65536dots/m²	
Pixel configuration	1R1G1B	
LED type	SMD2020	
Module weight	580±5g	
Module size	W250 *H250mm	
Module resolution	W64*H64 dots	
Module QTY/ m²	16 pcs/ m²	
Min. Viewing Distance	≥3.91m	
Brightness	≥800 cd/m²	
Viewing Angle	H≥170° (±5°) V≥170°(±5°)	
Driving Mode	1/16 scan constant current	
Interface	HUB75-16P	
Input voltage	4.5-5VDC	
Max. Power Consumption	33W / Piece	
Avg. Power Consumption	16.5W / Piece	
Max. Current	8.6A	
Signal Processing Depth	16384	
Vedio frame rate	60 frames/s	
Refresh Rate	≥3840Hz	
Defective Dots Rate	< 0.0001 (LED industry standard: ≤ 0.0003)	
Decay Rate(Operate 3 year	≤5% / year	
Brightness Conformity	≥98.5%	
Colors	281 trillion	
MTBF	≥10000 hours	
Lifespan	≥100000 hours	
Protective function	Over-heat/Over-load /Power-down /Power-leakage /Lightning-protection etc.	
Operating Temperature	-20℃～+40℃	
Operating Humidity	10-60% no condensation	
Storage Temperature	-20℃ ~ +60℃	
Storage Humidity	10-60% no condensation	
Control system parameter		
Color temperature	Adjustable by software.	
Brightness level	256 levels, automatic or manual adjustment.	
Control way	Computer, real-time, off-line, wireless, internet etc.	
Communication Distance	Cat5 UTP 100 meters, max. 130 meters; or optical fiber.	
Packing		
Carton	40pcs/carton	

Note: The specification may subject to change without prior notice.

